

QHC8-200-1000-20-S

0.2~1GHz, 20W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.2~1GHz
Insertion Loss:	1.2dB max.
VSWR:	1.4 max.
Isolation:	20dB min.
Amplitude Balance:	±0.4dB
Phase Balance:	180±5°
Average Power:	20W max.
Impedance:	50Ω

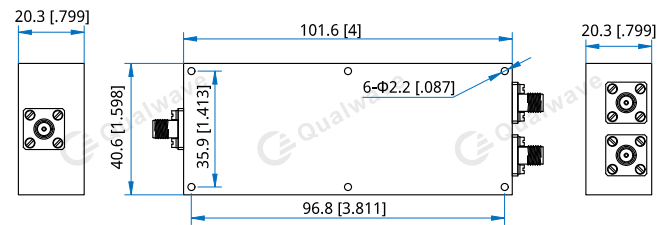
Mechanical

Size*1:	101.6*40.6*20.3mm 4*1.598*0.799in
Connectors:	SMA Female
Mounting:	6-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QHC8-200-1000-20-S

Customization is available upon request.