

## QDDC-2000-8000-K4

### 2~8GHz, 400W

#### Features:

- \* Broadband
- \* Low Insertion Loss

#### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

#### Electrical

Frequency:	2~8GHz
Coupling:	30±0.8, 40±0.8dB
Coupling Flatness:	±0.9dB max.
VSWR (Mainline):	1.4 max.
VSWR (Coupling):	1.4 max.
Insertion Loss:	0.4dB max.
Directivity:	14dB min.
Power*1:	400W CW max.
Peak Power:	3000W max.
Impedance:	50Ω

[1] The power needs to meet the matching VSWR not exceeding 1.2.

#### Mechanical

Size*2:	94.7*25.4*47.5mm 3.728*1*1.87in
RF Connectors:	N Female
Coupling Connectors:	SMA Female
Mounting:	4-Φ3.6mm through-hole

[2] Exclude connectors.

#### How To Order

**QDDC-2000-8000-K4-X-Y**

X: Coupling (30dB, 40dB)

Y: Connector type

#### Connector naming rules:

NS - N female & SMA female

#### Examples:


To order a dual directional coupler, 2~8GHz, 400W, 40dB, N female & SMA female, specify QDDC-2000-8000-K4-40-NS.

Customization is available upon request.

#### Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

#### Outline Drawings

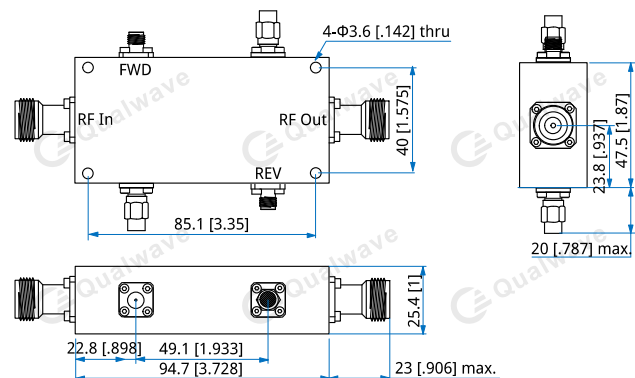

Unit: mm [in]

Tolerance: x.±1mm [±0.039in], .x±0.5mm [±0.02in], .xx±0.1mm [±0.004in]