

QHC8-200-1000-K75-N

0.2~1GHz, 750W

Features:
 * Broadband
 * High Power
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency:	0.2~1GHz
Insertion Loss:	0.3dB max.
VSWR:	1.3 max.
Isolation:	20dB min.
Amplitude Balance:	±0.35dB max.
Phase Balance:	180±5° max.
Average Power:	750W max.
Impedance:	50Ω

Mechanical


Size*1:	215.9*127*38.1mm 8.5*5*1.5in
Connectors:	N Female
Mounting:	10-Φ4.6mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature: -40~+85°C

Outline Drawings

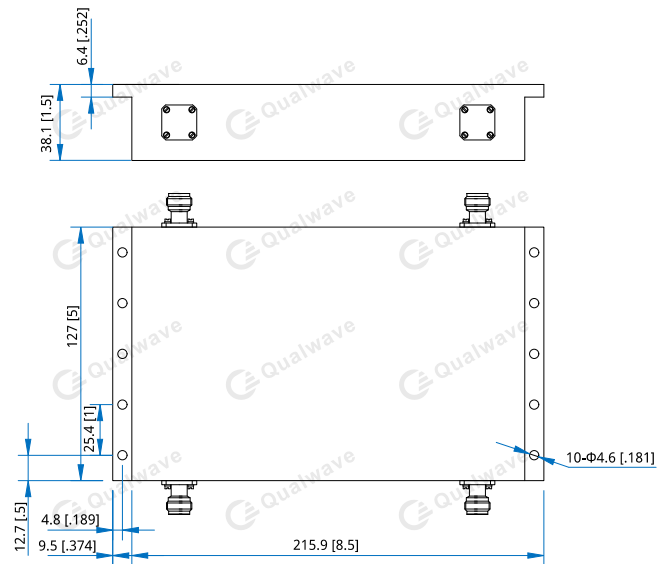

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QHC8-20-1000-K75-N

Customization is available upon request.