

## QDDC-300-8000-K6

0.3~8GHz, 600W

### Features:

- \* Broadband
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency:	0.3~8GHz
Coupling:	30±1, 40±1.1dB
Coupling Flatness:	±1.6dB max. (30±1dB) ±1.7dB max. (40±1.1dB)
VSWR (Mainline):	1.4 max.
VSWR (Coupling):	1.4 max.
Insertion Loss:	0.8dB max.
Directivity:	14dB min.
Power*1:	600W CW max.
Peak Power:	3000W max.
Impedance:	50Ω

[1] The power needs to meet the matching VSWR not exceeding 1.2.

### Mechanical

Size*2:	225.9*47.5*25.4mm 8.894*1.87*1in
RF Connectors:	N Female
Coupling Connectors:	SMA Female
Mounting:	4-Φ3.8mm through-hole

[2] Exclude connectors.

### How To Order

**QDDC-300-8000-K6-X-Y**

X: Coupling (30dB, 40dB)

Y: Connector type

### Connector naming rules:

NS - N female & SMA female

### Examples:


To order a dual directional coupler, 0.3~8GHz, 600W, 40dB, N female & SMA female, specify QDDC-300-8000-K6-40-NS.

Customization is available upon request.

### Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

### Outline Drawings

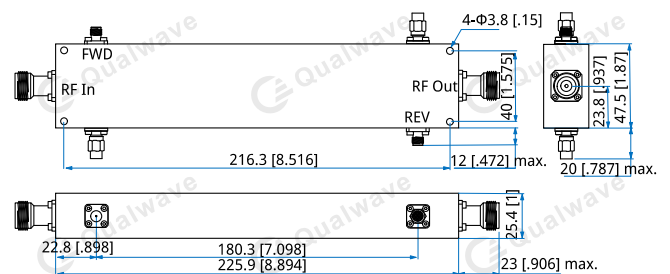

Unit: mm [in]

Tolerance: x.±1mm [±0.039in], .x±0.5mm [±0.02in], .xx±0.1mm [±0.004in]