

## QDDC-50-1000-K8-50-NS

0.05~1GHz, 800W, 50dB

### Features:

\* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical


Frequency:	0.05~1GHz
Insertion Loss:	0.3dB max.
Coupling:	50±2dB
Coupling Flatness:	±2dB
Directivity:	20dB min.
VSWR (Mainline):	1.3 max.
Average Power:	800W CW

### Mechanical

Size*1:	85*44*26mm 3.346*1.732*1.024in
RF Connectors:	N Female
Coupling Connectors:	SMA Female
Mounting:	4-Φ5mm through-hole

[1] Exclude connectors

### Outline Drawings

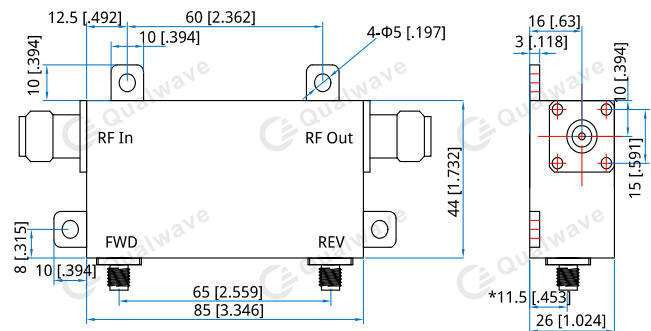

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QDDC-50-1000-K8-50-NS**

Customization is available upon request.