

QDDC-6000-67000-12

6~67GHz, 12W

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency: 6~67GHz
Power*1: 12W CW max.
Peak Power: 1000W max.
Impedance: 50Ω

[1] The power needs to meet the matching VSWR not exceeding 1.2.

Coupling (dB)	Insertion Loss (dB max.)	VSWR (max.)	Coupling Flatness (dB max.)	Directivity (dB min.)
10±1.2	3.7	2 (Mainline)	±1.2	8
		2 (Coupling)		
20±1.2	3.1	2 (Mainline)	±1.3	7
		2 (Coupling)		
30±1.2	3.0	2 (Mainline)	±1.3	7
		2 (Coupling)		

Mechanical


Size*2: 63.5*12.7*15.9mm
2.5*0.5*0.626in
RF Connectors: 1.85mm Female
Coupling Connectors: 1.85mm Female

[2] Exclude connectors.

Environmental

Operation Temperature: -55~+85°C
Non-operation Temperature: -55~+100°C

Outline Drawings

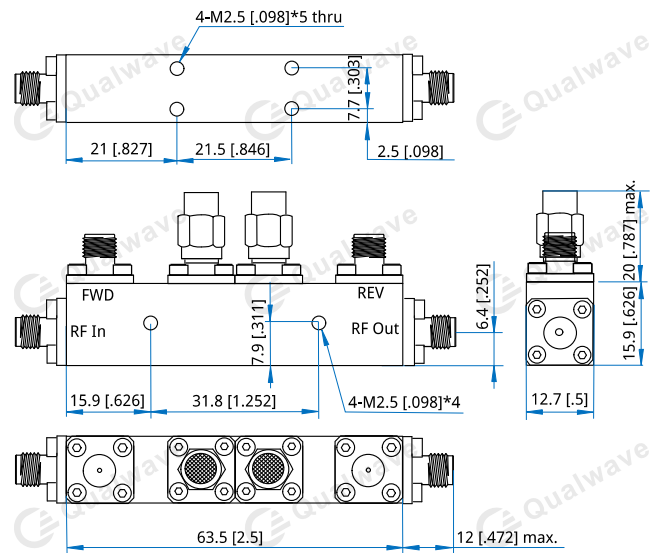

Unit: mm [in]

Tolerance: x.±1mm [±0.039in], .x±0.5mm [±0.02in], .xx±0.1mm [±0.004in]

How To Order

QDDC-6000-67000-12-X-Y

X: Coupling (10dB, 20dB, 30dB)

Y: Connector type

Connector naming rules:

V - 1.85mm female

Examples:

To order a dual directional coupler, 6~67GHz, 12W, 30dB, 1.85mm female, specify QDDC-6000-67000-12-30-V.

Customization is available upon request.