



QPD4-0.009-100-10K-A1N

4-Way, 9KHz~100MHz

Features:
* Small Size
* Low Insertion Loss

Applications:

* Amplifiers

* Mixers

* Antennas

* Laboratory Test

Electrical

Frequency: 9KHz~100MHz
Insertion Loss*1: 0.6dB max.
Input VSWR: 1.3 max.
Output VSWR: 1.4 max.
Isolation: 15dB min.

 $\begin{array}{lll} \mbox{Amplitude Balance:} & \pm 0.15 \mbox{dB max.} \\ \mbox{Phase Balance:} & \pm 3^{\circ} \mbox{ max.} \\ \mbox{Impedance:} & 50 \mbox{} \mbox{} \end{array}$

Power @SUM Port: 10000W max. as divider

10000W max. as combiner

[1] Excluding theoretical loss 6dB.

Mechanical

Size*2: 300*358*145mm


11.811*14.094*5.709in

Input Connectors: IF70
Output Connectors: N Female

Mounting: 14-Φ3.2mm through-hole

[2] Exclude connectors.

Outline Drawings

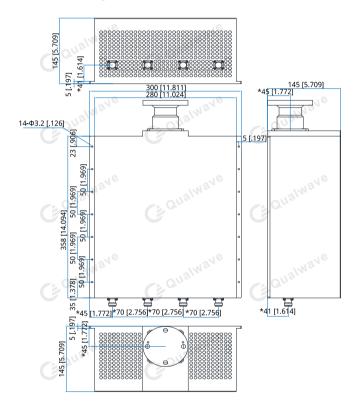

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in] *Ensure dimensions for design.

How To Order

QPD4-0.009-100-10K-A1N

Customization is available upon request.

www.qualwave.com