

QRC2-400-6000-K4-N

2-Way, 0.4~6GHz, 400W

Features:

- * Small Size
- * Low Insertion Loss
- * High Reliability

Applications:

- * Radar System
- * Communication System
- * Power Amplifier System
- * Test System

Electrical

Frequency:	0.4~6GHz
Insertion Loss:	1dB max.
VSWR:	1.6 max.
Amplitude Balance:	±0.3dB max.
Phase Balance:	±5° max.
Impedance:	50Ω
Power @SUM Port:	400W CW as combiner

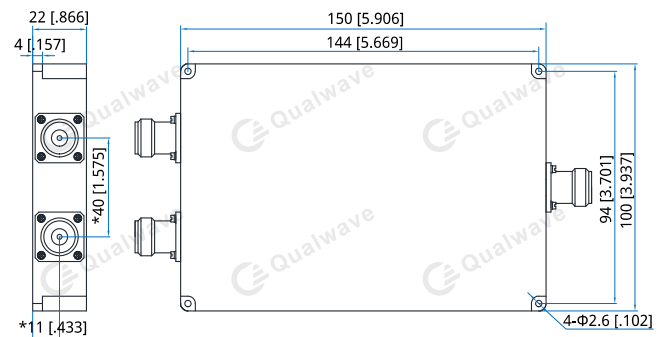
Mechanical

Size*1:	150*100*22mm 5.906*3.937*0.866in
Connectors:	N female
Mouting:	4-Φ2.6mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

*Ensure dimensions for design.

How To Order

QRC2-400-6000-K4-N

Customization is available upon request.