

QPD4-1000-6000-1K5-7N

4-Way, 1~6GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	1~6GHz
Insertion Loss ^{*1} :	0.5dB max.
VSWR (SUM Port):	1.3 max.
Isolation:	8dB min.
Amplitude Balance:	±0.2dB max.
Phase Balance:	±5° max.
Impedance:	50Ω
Power @SUM Port:	1500W max. as divider 1500W max. as combiner

[1] Exclude theoretical loss 6.0dB.

Mechanical


Size ^{*2} :	130*150*40mm 5.118*5.906*1.575in
Connectors:	7/16 DIN (L29) Female, N female
Mounting:	4-Φ3.6mm through-hole

[2] Exclude connectors.

Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

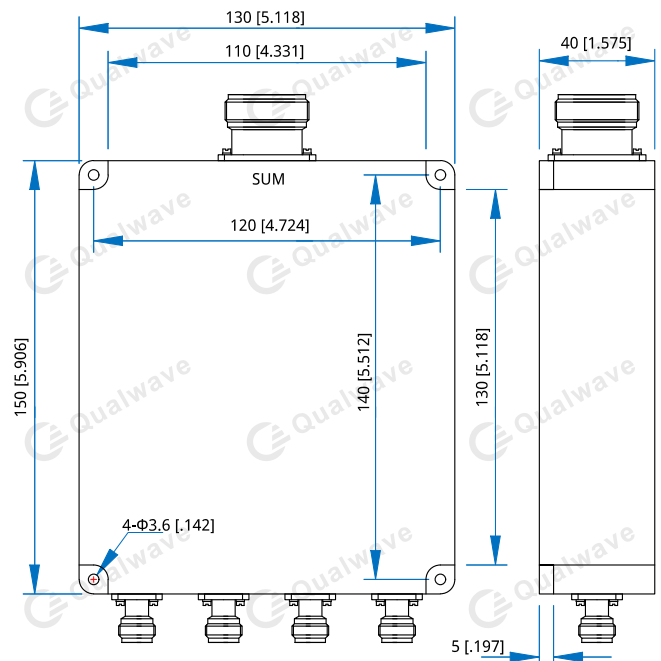

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QPD4-1000-6000-1K5-7N

Customization is available upon request.