

QSDC-300-6000-K25

0.3~6GHz, 250W

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.3~6GHz
Directivity:	15dB min.
Impedance:	50Ω
Average Power:	250W max.
Peak Power:	3000W max.

Coupling (dB)	Insertion Loss (dB max.)	VSWR (max.)	Coupling Flatness (±dB max.)
30±0.9	0.6	1.4	1.2
40±1	0.6	1.4	1.3


Mechanical

RF Connectors:	N Female
Coupling Connectors:	SMA Female
Mounting:	2-Φ3.6mm through-hole

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings

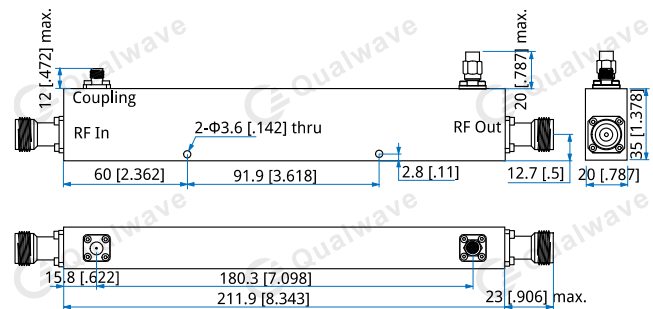

Unit: mm [in]

Tolerance: x.±1mm [±0.039in], .x±0.5mm [±0.02in], .xx±0.1mm [±0.004in]

How To Order

QSDC-300-6000-K25-X-Y

X: Coupling (30, 40dB)

Y: Connector type

Connector naming rules:

NS - N female & SMA female

Examples:

To order a single directional coupler, 0.3~6GHz, 250W, 30dB, N female & SMA female, specify QSDC-300-6000-K25-30-NS.

Customization is available upon request.