

QRF-1710-1940-40

1.71~1.94GHz, 40dB

Features: * High Stopband Rejection * Small Size	Applications: * Telecom * Laboratory Test * Receivers * Instrumentation
---	--

Electrical

Passband:	DC~1.66GHz 1.99~4.5GHz
Passband Insertion Loss:	1.5dB max. (at the corner: 2.0dB max.)
Passband VSWR:	1.7 max.
Stopband:	1.71~1.94GHz
Stopband Attenuation:	40dB min.
Average Power:	10W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	245*45*22mm 9.646*1.772*0.866in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	0~+40°C
--------------	---------

Outline Drawings

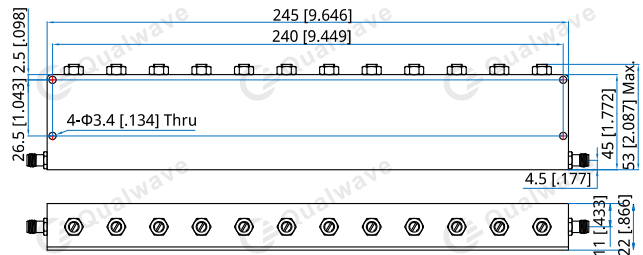

Unit: mm [in]

Tolerance: ±0.4mm [±0.016in]

How To Order

QRF-1710-1940-40

Customization is available upon request.