

QSDC-700-8000-K6

0.7~8GHz, 600W

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.7~8GHz
Directivity:	14dB min.
Impedance:	50Ω
Average Power:	600W max.
Peak Power:	3000W max.

Coupling (dB)	Insertion Loss (dB max.)	VSWR (max.)	Coupling Flatness (±dB max.)
30±0.8	0.5	1.4	1
40±0.8	0.5	1.4	1


Mechanical

RF Connectors:	N Female
Coupling Connectors:	SMA Female
Mounting:	4-M3*5

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings

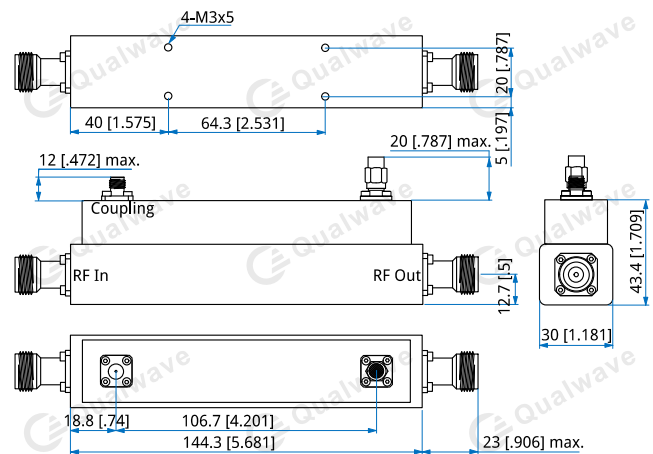

Unit: mm [in]

Tolerance: .xx±0.5mm [±0.02in], .xx±0.1mm [±0.004in]

How To Order

QSDC-700-8000-K6-X-Y

X: Coupling (30, 40dB)

Y: Connector type

Connector naming rules:

NS - N female & SMA female

Examples:

To order a single directional coupler, 0.7~8GHz, 600W, 30dB, N female & SMA female, specify QSDC-700-8000-K6-30-NS.

Customization is available upon request.