

QWCK-187

WR-187, 3.94~5.99GHz


Features:
 * Broad Band
 * Low VSWR

Applications:
 * Calibration
 * Laboratory Test

Components

Part Number	Frequency (GHz)	VSWR (Max.)	Description	Material	Finish	Coating	Quantity (pcs)	Outline Drawings
QWCA-187-SF-R-2-1	3.94~5.99	1.2	Waveguide to coax adapter, WR-187 (BJ48) to SMA(f), right angle, FDP48	Aluminium	Conductive oxidation	Gray paint	2	Outline A
QWT187-A-2	3.94~5.99	1.03	Low power waveguide termination, WR-187 (BJ48), FDP48	Aluminium	Conductive oxidation	Gray paint	1	Outline B
QWS187-A-2	3.94~5.99	-	Waveguide short, WR-187 (BJ48), Xmm, FDP48	Aluminium	-	-	1	Outline D
QWSS187-X-A-2	3.94~5.99	-	1/4λ Waveguide straight section, WR-187 (BJ48), Xmm, FDP48	Aluminium	-	-	1	Outline C
Storage Box	Aluminum Alloy						1	-
Screw							1 set	-

Outline Drawings

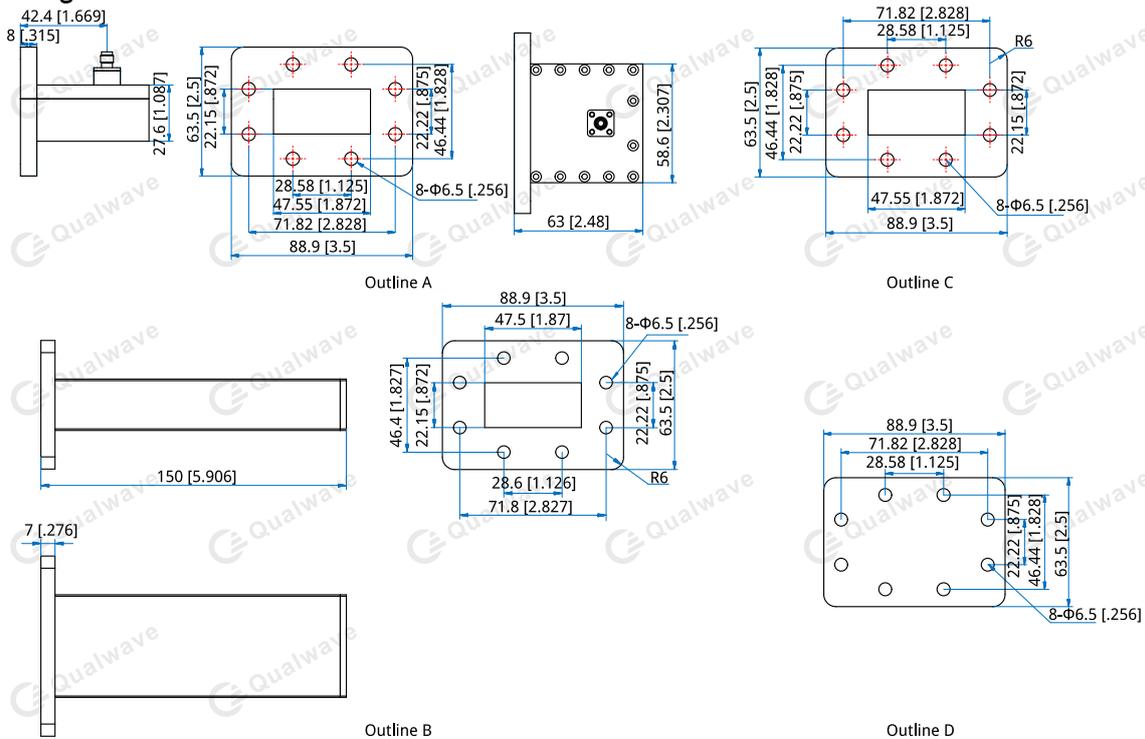

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

Environmental

Operating Temperature: -40~+85°C

Non-operating Temperature: -50~+80°C

How To Order**QWCK-187** All the 5 components in one box.