

QCN-FCB-R600-1

N Female Crimp

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

| | |
|--------------------------|-------------|
| Frequency: | DC~6GHz |
| VSWR: | 1.3 max. |
| Impedance of Dielectric: | 5000MΩ min. |
| Voltage Withstand: | 1000V DC |
| Impedance: | 50Ω |


Mechanical

| | |
|--------------------|-----------------------------------|
| RF Connector: | N female |
| Mating Cable: | QR600, LMR240 |
| Mating Life Cycle: | 500 cycles |
| Outer Conductor: | Ternary plated brass |
| Dielectric: | PTFE |
| Inner Conductor: | Gold plated tin phosphorus bronze |

Environmental

| | |
|--------------|------------|
| Temperature: | -55~+125°C |
|--------------|------------|

Outline Drawings

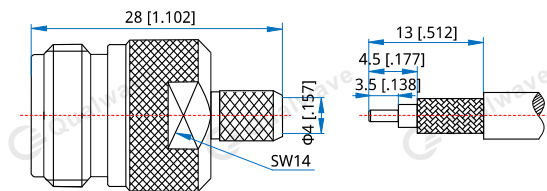

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QCN-FCB-R600-1

Customization is available upon request.