

QWT5-R3 WR-5, 0.3W

Features:
* Low VSWR
* Broadband

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 145~220GHz
Average Power 0.3W
VSWR: 1.25 max.

Mechanical

Interface: WR-5 (BJ1800)
Flange: FUGP1800
Material: Gold plated copper

How To Order

QWT5-R3-Y-Z

Y: Material

Z: Flange type

Material naming rules:

C - Copper (Outline A)

Flange naming rules:


15 - FUGP (Outline A)

Examples:

To order a low power waveguide termination, WR-5, 0.3W, Copper, FUGP1800, specify QWT5-R3-C-15.

Customization is available upon request.

Outline Drawings

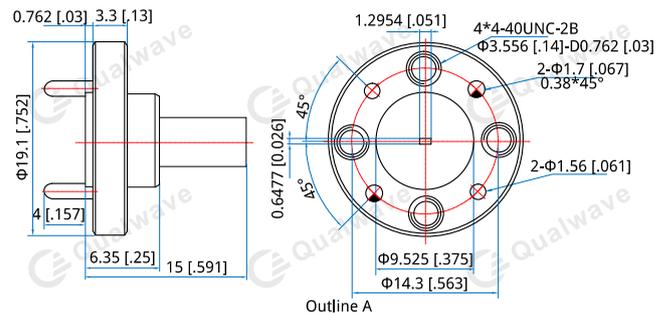

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]