

QWT62-3 WR-62, 3W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 11.9~18GHz
Average Power: 3W
VSWR: 1.03 max.


Mechanical

Waveguide Size: WR-62 (BJ140)
Flange: FBP140

Environmental

Temperature: -55~+125°C

Outline Drawings

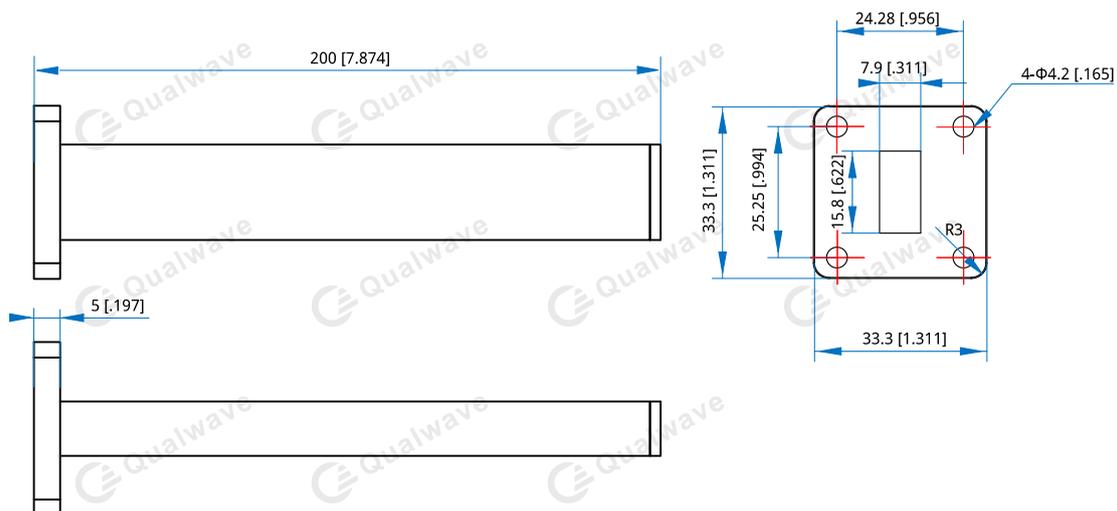

Outline A

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

QWT62-3-Y-Z

Y : Material

Z : Flange type

Material naming rules:
A - Aluminum (Outline A)

Flange naming rules:

1 - FBP140 (Outline A)

Examples:

To order a low power waveguide termination, WR-62, 3W, FBP140, specify QWT62-3-A-1.

Customization is available upon request.