

QANEX4

NEX10 to 4.3-10

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	DC~6GHz
VSWR:	1.25 max.
PIM:	-155dBc max.
Dielectric Withstanding Voltage:	2500V RMS, 50Hz, at sea level min.
Impedance of Dielectric:	5000MΩ min.
Impedance:	50Ω

Mechanical

RF Connectors:	NEX10 4.3-10
Mating Life Cycle:	500 cycles
Inner Conductor:	Silver plated brass
Dielectric:	PTFE
Outer Conductor:	Ternary alloy plated brass

Environmental


Temperature:	-45~+125°C
--------------	------------

How To Order

QANEX4-MF - NEX10(m) to 4.3-10(f), Outline A

Customization is available upon request.

Outline Drawings

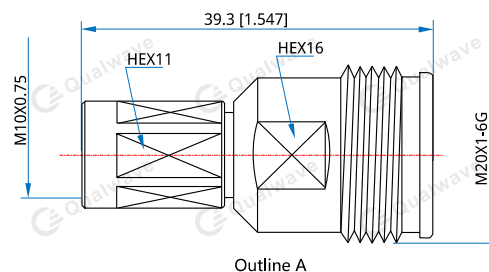

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]