

# QCC-32000-38000-10-K-1

## 32~38GHz, 10W

Features:  
 \* Broadband  
 \* High Power  
 \* Low Insertion Loss

Applications:  
 \* Wireless  
 \* Radar  
 \* Laboratory Test

### Electrical

Frequency:	32~38GHz
Insertion Loss:	1.2dB max.
Isolation:	15dB min.
VSWR:	1.5 max.
Average Power:	10W

### Mechanical


Size <sup>*1</sup> :	13*25*16.8mm 0.512*0.984*0.661in
RF Connectors:	2.92mm Female
Mounting:	3-M2.5 through-hole
Direction:	Clockwise

[1] Exclude connectors.

### Environmental

Temperature:	-30~+70°C
--------------	-----------

### Outline Drawings

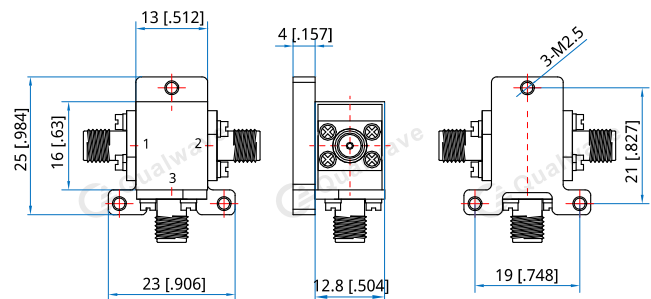

Unit: mm [in]

Tolerance:  $\pm 0.15\text{mm}$  [ $\pm 0.006\text{in}$ ]

### How To Order

**QCC-32000-38000-10-K-1**

Customization is available upon request.