

QDDC-0.009-260-3K-50-7S

9KHz~0.26GHz, 3000W, 50dB

Features:
* Low Insertion Loss

Applications:
* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	9KHz~0.26GHz
Coupling:	50±1dB
Coupling Flatness:	±0.5dB max.
VSWR (Mainline):	1.2 max.
VSWR (Coupling):	1.3 max.
Insertion Loss:	0.25dB max.
Directivity:	18dB min. @9KHz~20KHz 20dB min. @20KHz~260MHz
Average Power:	3000W

Mechanical


Size ^{*1} :	203.2*55.9*55.9mm 8*2.201*2.201in
RF Connectors:	7/16 DIN (L29) female
Coupling Connectors:	SMA female
Mounting:	4-M3-6H-D8mm

[1] Exclude connectors

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

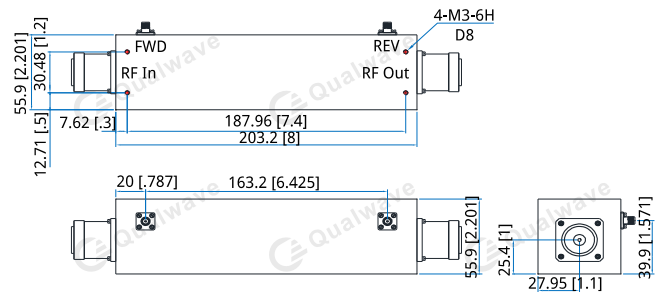

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDDC-0.009-260-3K-50-7S

Customization is available upon request.