

QDDC-300-6000-K12

0.3~6GHz, 120W

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.3~6GHz
Coupling:	30±1, 40±1dB
Coupling Flatness:	±1.1dB max.
VSWR (Mainline):	1.3 max.
VSWR (Coupling):	1.3 max.
Insertion Loss:	0.8dB max.
Directivity:	18dB min.
Power*1:	120W CW max.
Peak Power:	3000W max.
Impedance:	50Ω

[1] The power needs to meet the matching VSWR not exceeding 1.2.

Mechanical

Size*2:	173*30*17.5mm 6.811*1.181*0.689in
RF Connectors:	N Female
Coupling Connectors:	SMA Female
Mounting:	4-Φ3.6mm through-hole 8-M2.5*6

[2] Exclude connectors.

How To Order

QDDC-300-6000-K12-X-Y

X: Coupling (30dB, 40dB - Outline A)

Y: Connector type

Connector naming rules:

NS - N female & SMA female (Outline A)

Examples:


To order a dual directional coupler, 0.3~6GHz, 120W, 40dB, N female & SMA female, specify QDDC-300-6000-K12-40-NS.

Customization is available upon request.

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings

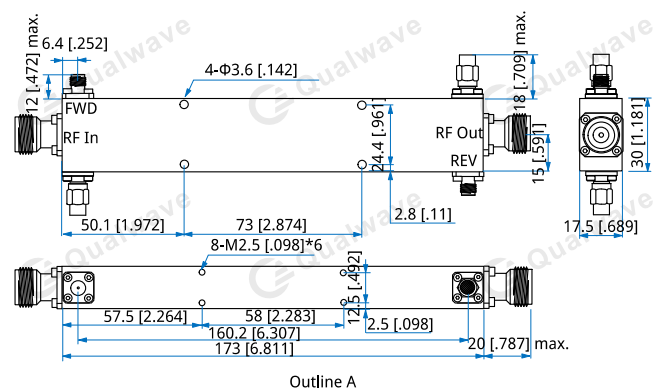

Unit: mm [in]

Tolerance: x.±1mm [±0.039in], .x±0.5mm [±0.02in], .xx±0.1mm [±0.004in]