

QDDC-600-2700-3K-50-7S

0.6~2.7GHz, 3000W, 50dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	0.6~2.7GHz
Insertion Loss:	0.45dB max.
Coupling:	50±1.5dB max.
Directivity:	16dB min.
VSWR(Mainline):	1.35 max.
Average Power:	3000W CW @6000W PW

Mechanical

Size*1:	85*50*32mm 3.346*1.969*1.26in
RF Connectors:	7/16 DIN (L29) female
Coupling Connectors:	SMA female
Mounting:	4-Φ5mm through hole

[1] Exclude connectors.

Outline Drawings

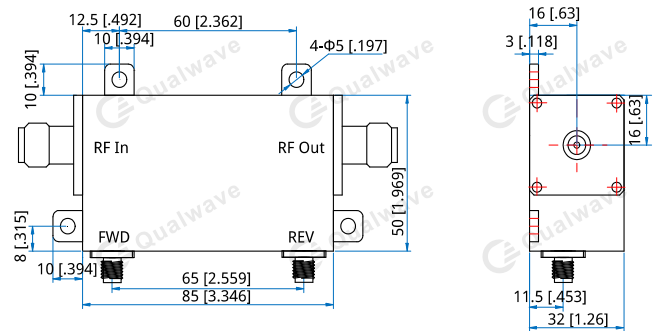

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QDDC-600-2700-3K-50-7S

Customization is available upon request.