

## QDDC-9000-13000-75-20-S

9~13GHz, 75W, 20dB

### Features:

\* Low Insertion Loss

### Applications:

\* Amplifiers  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency:	9~13GHz
Insertion Loss:	0.6dB max.
Coupling:	20±1dB
Directivity:	12dB min.
VSWR (Mainline):	1.5 max.
VSWR (Coupling):	1.5 max.
Average Power:	75W

### Mechanical


Size <sup>*1</sup> :	33*15*11mm 1.299*0.591*0.433in
Connectors:	SMA Female
Mounting:	2-Φ2.3mm through hole

[1] Exclude connectors

### Environmental

Temperature:	-55~+85°C
--------------	-----------

### Outline Drawings

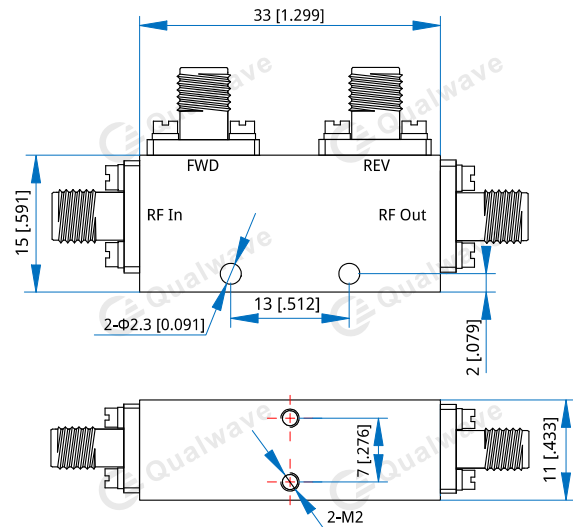

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

### How To Order

**QDDC-9000-13000-75-20-S**

Customization is available upon request.