

QWT4-10

WR-4, 10W

Features:
 * Low VSWR
 * Broadband

Applications:
 * Transmitters
 * Antennas
 * Laboratory Test
 * Impedance Matching

Electrical

Frequency: 172~261GHz
 Average Power: 10W

Mechanical

Interface: WR-4 (BJ2200)
 Flange: FUGP2200
 Material: Copper
 Coating: Gold plated

How To Order

QWT4-10-Y-Z

Y: Material

Z: Flange type

Material naming rules:
 C - Copper (Outline A)


Flange naming rules:
 15 - FUGP (Outline A)

Examples:

To order a high power waveguide termination, 172~261GHz,
 Copper, FUGP2200, specify QWT4-10-C-15.

Customization is available upon request.

Outline Drawings

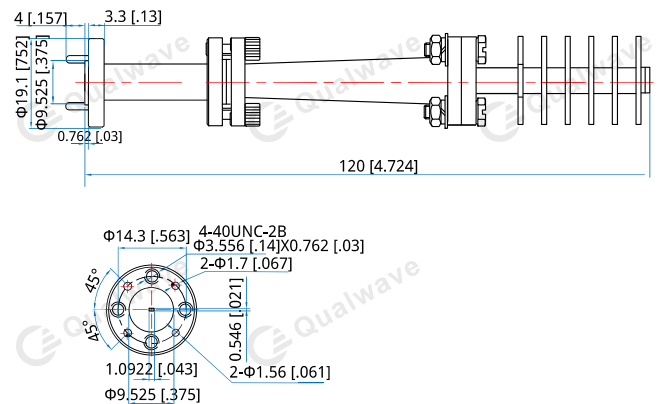

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]