

QWTD750-K8 WRD-750, 800W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching


Electrical

Frequency: 7.5~18GHz
VSWR: 1.2 max.
Average Power: 800W

Mechanical

Waveguide Size: WRD-750
Flange: FPWRD750
Finish: Conductive oxidation
Material: Aluminium
Coating: Black paint

Outline Drawings

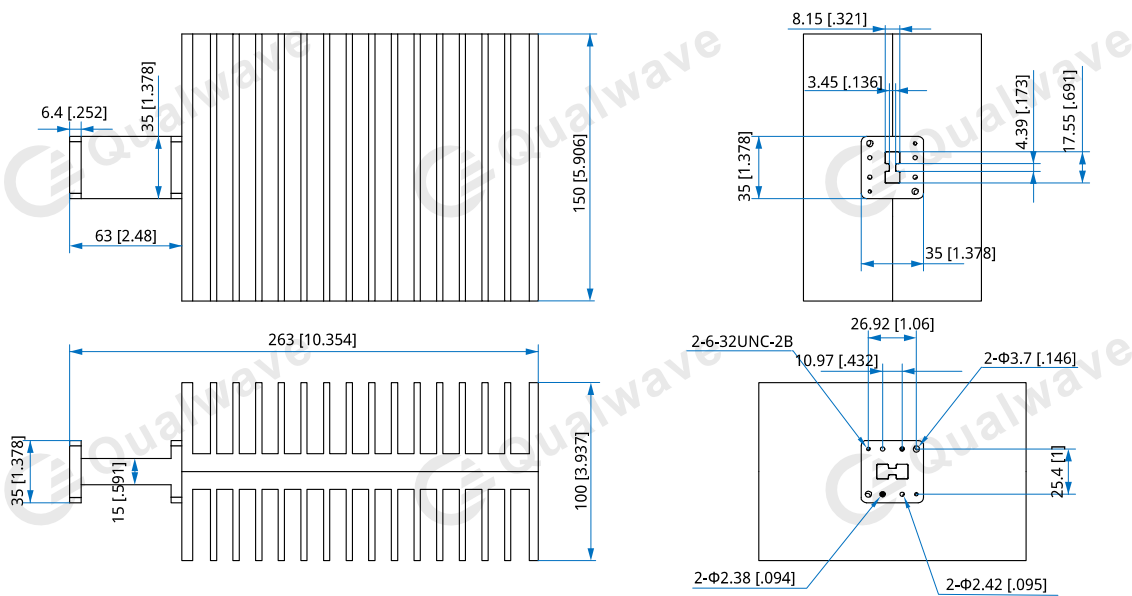

Outline A

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

QWTD750-K8-Y-Z

Y : Material

Z : Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

8 - FPWRD (Outline A)

Examples:

To order a high power waveguide termination, WRD-750, 800W, Aluminum, FPWRD750, specify QWTD750-K8-A-8.

Customization is available upon request.