

QL-0-20000-16

DC~20GHz, 16dBm

Features:
* Broadband

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical


| | |
|-----------------|------------|
| Frequency: | DC~20GHz |
| Insertion Loss: | 1.8dB max. |
| Flat Leakage: | 16dBm max. |
| Power Handling: | 37dBm typ. |
| VSWR: | 1.8 typ. |
| Impedance: | 50Ω |

Mechanical

| | |
|----------------------|-------------------------------------|
| Size ^{*1} : | 15.24*12.7*10.16mm 0.6*0.5*0.4in |
| RF Connectors: | SMA |
| Mounting: | 2-Φ2.2mm through-hole |

[1] Exclude connectors.

Outline Drawings

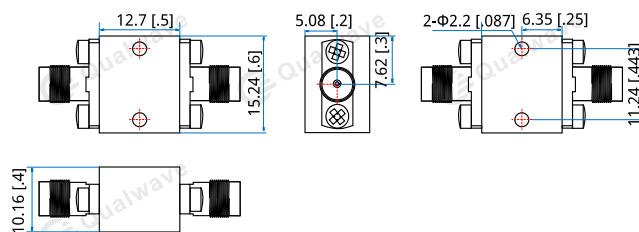

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

QL-0-20000-16

Customization is available upon request.