

## QLF-1100-60

DC~1.1GHz, 60dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Frequency:	DC~1.1GHz
Pass Band Insertion Loss:	0.9dB max.
VSWR:	1.4 max.
Stop Band Attenuation:	60dB@1.5~3GHz min.
Power:	5W

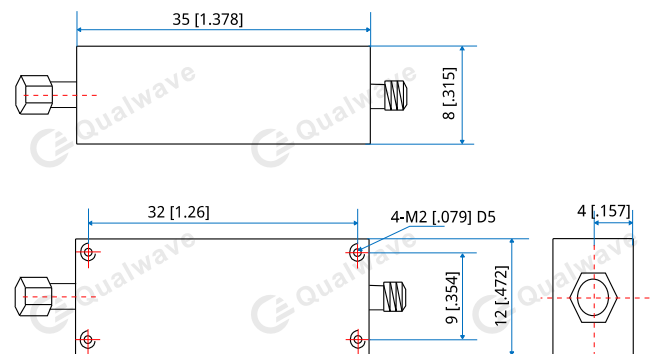
**Mechanical**

Size <sup>*1</sup> :	35*12*8mm 1.378*0.472*0.315in
RF Connectors:	SMA Male SMA Female
Mounting:	4-M2, depth 5mm

[1] Exclude connectors

**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QLF-1100-60**

Customization is available upon request.