

# QLF-2000-50

## DC~2GHz, 50dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Frequency:	DC~2GHz
Insertion Loss:	1dB max.
VSWR:	1.5 max.
Stop Band Attenuation:	50dB@2.3~4GHz min. 40dB@4~7GHz min.
Average Power:	10W max.
Impedance:	50Ω

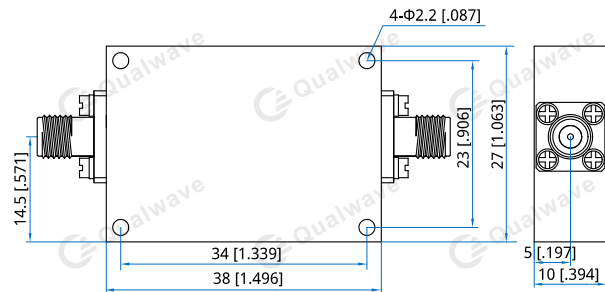
**Mechanical**

Size*1:	38*27*10mm 1.496*1.063*0.394in
RF Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors

**Environmental**

Operating Temperature:	-45~+85°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**QLF-2000-50**

Customization is available upon request.