

QLF-2250-30

DC~2.25GHz, 30dB

Features:
 * High Stopband Rejection
 * Small Size

Applications:
 * Telecom
 * Laboratory Test
 * Receivers
 * Instrumentation

Electrical

| | |
|------------------------|------------------|
| Frequency: | DC~2.25GHz |
| Insertion Loss: | 1.2dB max. |
| VSWR: | 1.2 typ. |
| Stop Band Attenuation: | 30dB@3~5GHz typ. |
| Average Power: | 10W max. |
| Impedance: | 50Ω |

Mechanical


| | |
|----------------------|----------------------------|
| Size ^{*1} : | 20*Φ11mm 0.787*Φ0.433in |
| RF Connectors: | SMA |

[1] Exclude connectors.


Environmental

| | |
|----------------------------|-----------|
| Operating Temperature: | -40~+70°C |
| Non-operating Temperature: | -55~+85°C |

Typical Performance Curves

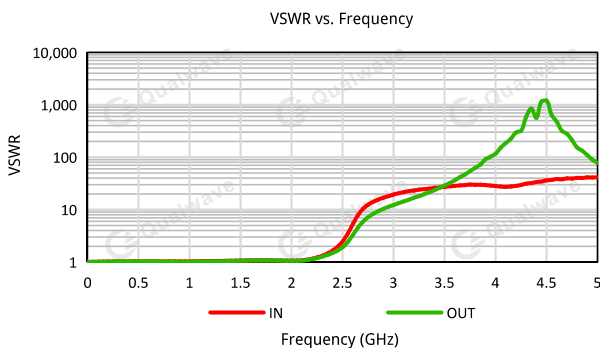

Outline Drawings

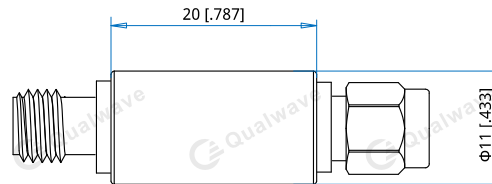

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

QLF-2250-30

Customization is available upon request.

