

## QWT6-R5

### WR-6, 0.5W

#### Features:

- \* Low VSWR
- \* Broadband

#### Applications:

- \* Transmitters
- \* Antennas
- \* Laboratory Test
- \* Impedance Matching

#### Electrical

|               |            |
|---------------|------------|
| Frequency:    | 110~170GHz |
| Average Power | 0.5W max.  |
| VSWR:         | 1.06 max.  |

#### Mechanical

|            |      |
|------------|------|
| Interface: | WR-6 |
|------------|------|

#### Environmental


|                           |           |
|---------------------------|-----------|
| Operation Temperature:    | 0~+40°C   |
| No-Operation Temperature: | -40~+70°C |

#### How To Order

**QWT6-R5**

Customization is available upon request.

#### Outline Drawings

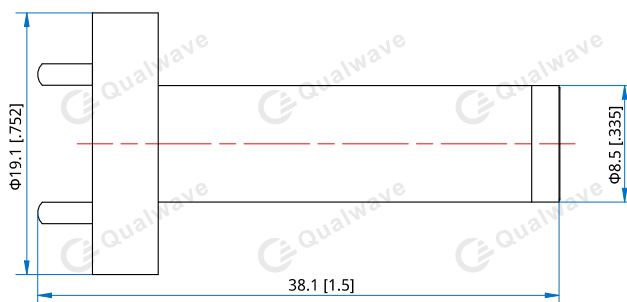

Unit: mm [in]

Tolerance:  $\pm 0.5\text{mm}$  [ $\pm 0.02\text{in}$ ]