

QMP2-0-18000-1

DC~5.75GHz, 6.25~18GHz

Features: * High Stopband Rejection * Small Size	Applications: * Telecom * Laboratory Test * Transceivers * Instrumentation
---	---

Electrical

Channel 1 (L):	DC~5.75GHz
Channel 2 (H):	6.25~18GHz
Passband Insertion Loss:	1.5dB max.
Rejection (L):	60dB min. @7~18GHz
Rejection (H):	60dB min. @DC~5.5GHz
VSWR:	2 max.
Isolation:	45dB min.
Input power:	10W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	48*40*10mm 1.89*1.575*0.394in
RF Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature: -40~+70°C

Outline Drawings

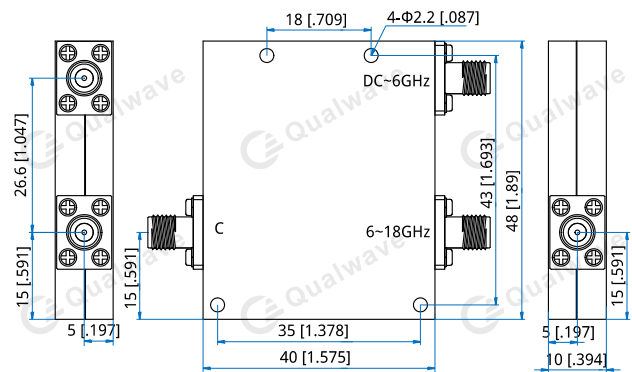

Unit: mm [in]
 Tolerance: ±0.3mm [±0.012in]

How To Order

QMP2-0-18000-1

Customization is available upon request.