

QMP2-2300-3800-1

2.3~2.4GHz, 3.3~3.8GHz

Features:
 * High Stopband Rejection
 * Small Size

Applications:
 * Telecom
 * Laboratory Test
 * Transceivers
 * Instrumentation

Electrical

Channel 1 (L): 2.3~2.4GHz
 Channel 2 (H): 3.3~3.8GHz
 Passband Insertion Loss: 1dB max.
 Rejection (CH L): 50dB min. @3.3~3.8GHz
 Rejection (CH H): 50dB min. @2.3~2.4GHz
 VSWR: 1.5 max.
 Input Power: 1W
 Impedance: 50Ω

Mechanical


Size^{*1}: 83*64*19mm
 3.268*2.52*0.748in
 RF Connectors: SMA Female
 Mounting: 4-Φ2.8 through-hole

[1] Exclude connectors.

Environmental

Operating Temperature: -40~+70°C

Outline Drawings

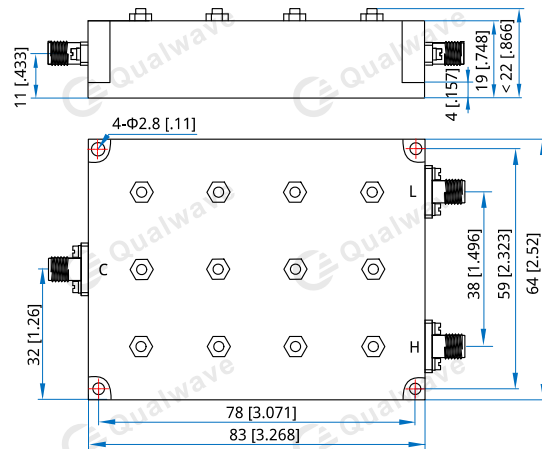

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QMP2-2300-3800-1

Customization is available upon request.