

QPXO-9.5-5ET-164

9.5MHz, External Reference

Features:
* Low phase noise

Applications:
* Wireless
* Transceiver
* Laboratory Test

Electrical

Output Frequency:	9.5MHz
External Reference:	10MHz
Frequency Stability:	10MHz
Output Power:	5dBm min.
Spurious:	-70dBc max.
Harmonic:	-25dBc max.
Phase Noise:	-140dBc/Hz max.@100Hz -155dBc/Hz max.@1KHz -164dBc/Hz max.@10KHz -165dBc/Hz max.@100KHz -165dBc/Hz max.@1MHz
Voltage:	+12V DC
Current:	550mA max. (first) 350mA max. (stable)
Impedance:	50Ω

Mechanical


Size*1:	80*60*20mm 3.15*2.362*0.787in
RF Connectors:	SMA Female
Power Supply Connectors:	Feed Through/Terminal Post
Mounting:	4-M2.5mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+75°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

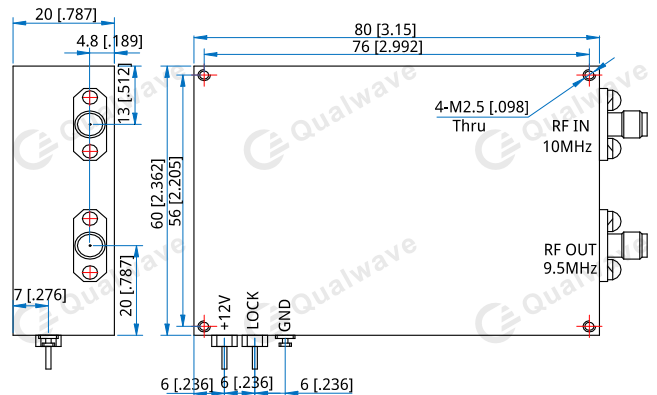

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPXO-9.5-5ET-164

Customization is available upon request.