

QPA-5650-5925-52-50S

5.65~5.925GHz, 52dB, 50dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	5.65~5.92GHz
Small Signal Gain:	52dB min.
Output Power (Psat):	50dBm min.
Input Power:	3±1dBm max.
Spurious:	-65dBc max.
Harmonic:	-40dBc max.
Input VSWR:	1.8 typ.
Voltage:	30V/15A VCC (Reference) +32V max.
PTT:	3.3~5V (On)
Current:	11A max.
Protection Function:	80°C protection, Open protection
Impedance:	50Ω

Mechanical

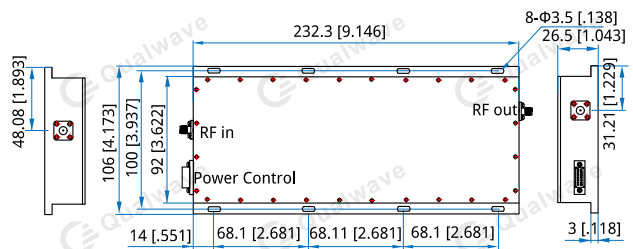
Size ^{*1} :	232.3*106*26.5mm 9.146*4.173*1.043in
Weight:	0.88kg max.
RF Connectors:	SMA Female
Power Supply Connectors ^{*2} :	J30J-15P(1~7 feet 28V, 8 feet PPT, 9~15 feet GND)

[1] Exclude connectors.

[2] Install heat sink during testing. IP44 rated, output with isolator.

Environmental

Operating Temperature: -25~+55°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QPA-5650-5925-52-50S

Customization is available upon request.