

QRC4-1000-6000-K8-7N

4-Way, 1~6GHz, 800W

Features:

- * Small Size
- * Low Insertion Loss
- * High Reliability

Applications:

- * Radar System
- * Communication System
- * Power Amplifier System
- * Test System

Electrical

Frequency:	1~6GHz
Insertion Loss:	0.6dB(AVG) max.
VSWR (SUM Port):	1.4 max.
Amplitude Balance:	±0.3dB max.
Phase Balance:	±5° max.
Impedance:	50Ω
Power @SUM Port:	800W as combiner

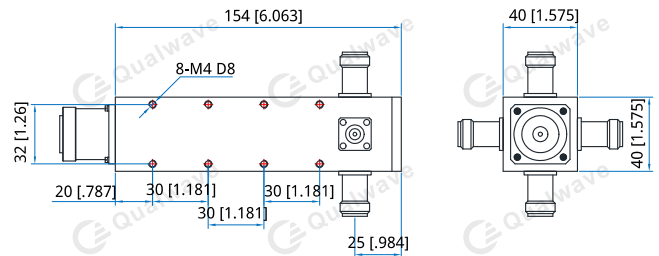
Mechanical

Size*1:	154*40*40mm 6.063*1.575*1.575in
Connectors:	7/16 DIN (L29) female, N female

[1] Exclude connectors.

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QRC4-1000-6000-K8-7N

Customization is available upon request.