

QRC8-2000-4000-1K-7N

8-Way, 2~4GHz, 1000W

Features:

- * Small Size
- * Low Insertion Loss
- * High Reliability

Applications:

- * Radar System
- * Communication System
- * Power Amplifier System
- * Test System

Electrical


Frequency:	2~4GHz
Insertion Loss:	0.5dB max.
VSWR:	1.5 max.
Amplitude Balance:	±0.5dB max.
Phase Balance:	±5° max.
Impedance:	50Ω
Power @SUM Port:	1000W CW as combiner

Mechanical

Size*1:	Φ160*32.5mm Φ6.299*1.28in
Connectors:	7/16 DIN female, N female

[1] Exclude connectors.

Outline Drawings

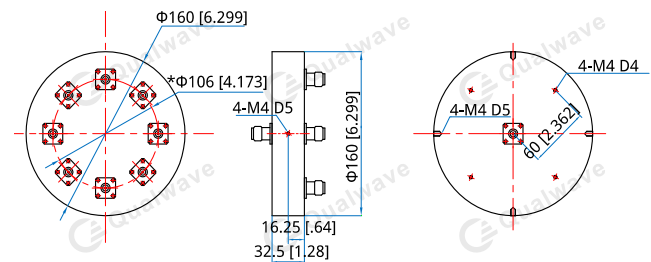

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QRC8-2000-4000-1K-7N

Customization is available upon request.