

QWRJ2-27600-26-U-A

Channel 1, 25.1~27.6GHz, Channel 2, 25.1~27.6GHz, 26mm, U-type

Features:	Applications:
* Low VSWR	* High Speed Digital Signal
* Low VSWR Flatness	Transmission
* Low Insertion Loss Flatness	* Analog Signal Transmission

Electrical

Frequency:	25.1~27.6GHz
VSWR:	1.5 max.
VSWR Flatness:	0.2 max.
Insertion Loss:	0.5dB max.
Insertion Loss Flatness:	0.1dB max.
Average Power:	100W max.
Peak Power:	500W
IP Grade:	IP40

Mechanical

Interface:	WR-34 (BJ260)
Flange:	FBP260
Rotating Speed:	60RPM max
Torque:	0.3Nm max
Operation Life:	10M Cycles min.
Material:	Aluminium
Style:	U-type

Environmental


Operating Temperature:	-55~+125°C
Operating Humidity:	95% max.

How To Order

[QWRJ2-27600-26-U-A](#)

Customization is available upon request.

Outline Drawings

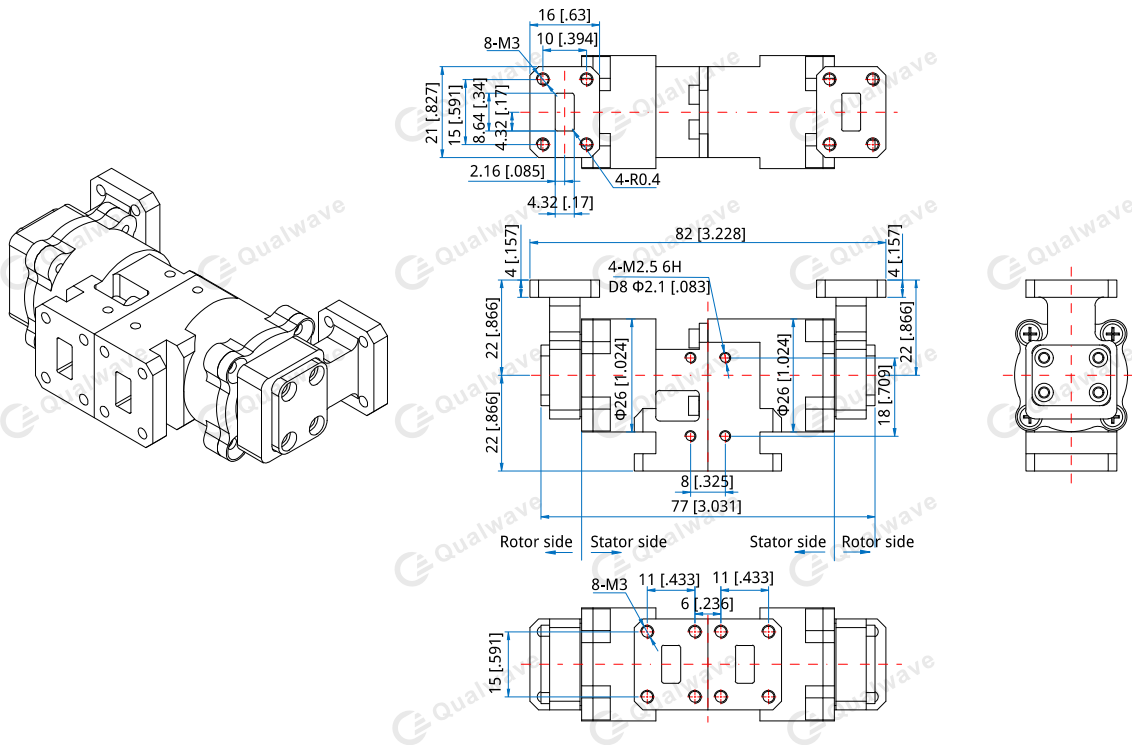

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]