

QSDC-0-40000-20

0~40GHz, 20W

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0~40GHz
Coupling:	10±2.2, 20±2.2dB
Average Power:	20W
Peak Power:	3000W max.

Mechanical

Size*1:	111.8*17.8*12.7mm
	4.402*0.701*0.5in
Connectors:	2.92mm female
Mounting:	2-Φ2.4mm through-hole

[1] Exclude connectors and terminations.

Electrical (10dB)

Frequency (GHz)	Coupling (dB typ./max.)	Insertion Loss (dB typ./max.)	Directivity (dB typ./min.)	VSWR (Mainline) (typ./max.)	VSWR (Coupling) (typ./max.)
DC~0.3	25/-	0.2/0.7	25/-	1.1/1.3	1.1/1.3
0.3~0.5	12/-	0.5/0.9	25/-	1.1/1.3	1.1/1.3
0.5~26.5	10/10±2.2	1.6/2.4	16/12	1.3/1.6	1.3/1.6
26.5~40	10/10±2.2	2.2/2.9	13/10	1.4/1.7	1.4/1.7

Electrical (20dB)

Frequency (GHz)	Coupling (dB typ./max.)	Insertion Loss (dB typ./max.)	Directivity (dB typ./min.)	VSWR (Mainline) (typ./max.)	VSWR (Coupling) (typ./max.)
DC~0.3	35/-	0.2/0.5	25/-	1.1/1.3	1.1/1.3
0.3~0.5	22/-	0.2/0.5	25/-	1.1/1.3	1.1/1.3
0.5~26.5	20/20±2.2	1.2/2	16/12	1.3/1.6	1.3/1.6
26.5~40	20/20±2.2	1.8/2.6	13/10	1.4/1.7	1.4/1.7

Environmental

Operating Temperature:	-55~+85°C
Non-operating Temperature:	-55~+100°C

How To Order

QSDC-0-40000-20-X-Y

X: Coupling (10, 20dB)

Y: Connector type

Connector naming rules:


K - 2.92mm female

Examples:

To order a single directional coupler, 0~40GHz, 20W, 10dB, 2.92mm female, specify QSDC-0-40000-20-10-K.

Customization is available upon request.

Outline Drawings

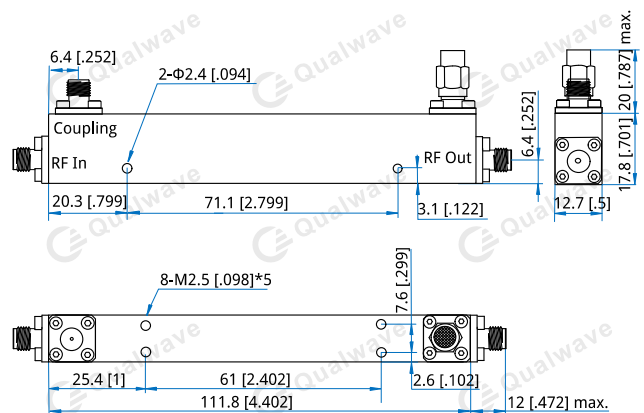

Unit: mm [in]

Tolerance: x±1mm [±0.039in], .x±0.5mm [±0.02in], .xx±0.1mm [±0.004in]