

QSDC-0.003-100-1-10-S

0.003~100MHz, 1W, 10dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.003~100MHz
Insertion Loss:	1.6dB max.
Coupling:	10±1dB
VSWR (Mainline):	1.35 max.
VSWR (Coupling):	1.35 max.
Average Power:	1W

Mechanical

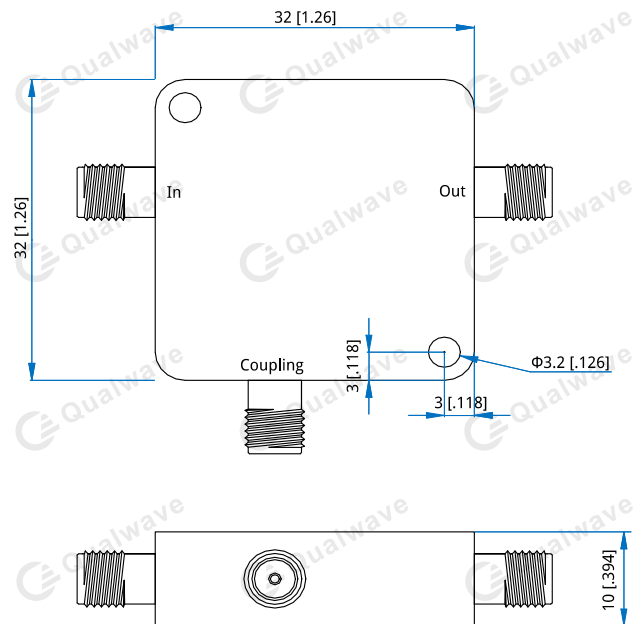
Size ^{*1} :	32*32*10mm 1.26*1.26*0.394in
Connectors:	SMA Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors.

How To Order

QSDC-0.003-100-1-10-S

Customization is available upon request.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]