

## QSDC-10900-13500-12-30-S

10.9~13.5GHz, 12W, 30dB

**Features:**

- \* Broadband
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

Frequency:	10.9~13.5GHz
Insertion Loss:	0.6dB max.
VSWR:	17dB min.
Directivity:	17dB min.
Coupling:	30±1.2dB
Impedance:	50Ω
Average Power:	12W min.

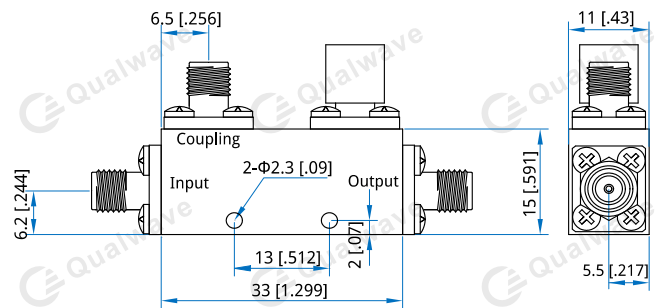
**Mechanical**

Size <sup>*1</sup> :	33*15*11mm 1.299*0.591*0.43in
Connectors:	SMA Female
Mounting:	2-Φ2.3mm through-hole

[1] Exclude connectors and terminations.

**Environmental**

Temperature:	-40~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

**How To Order**

[QSDC-10900-13500-12-30-S](#)

Customization is available upon request.