

## QSDC-2000-6500-K3-20-NS

2~6.5GHz, 300W, 20dB

**Features:**

- \* Broadband
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

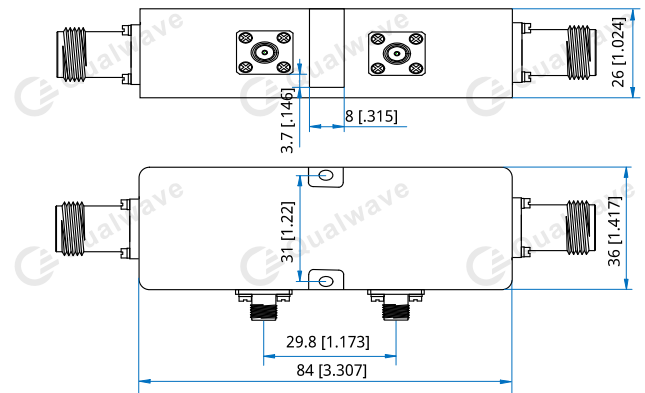
**Electrical**

Frequency:	2~6.5GHz
Insertion Loss:	0.5dB max.
Coupling:	20±1.5dB
VSWR:	1.5 max.
Average Power:	300W CW

**Mechanical**

Size <sup>*1</sup> :	84*36*26mm 3.307*1.417*1.024in
Connectors:	N Female, SMA Female

[1] Exclude connectors and terminations.

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QSDC-2000-6500-K3-20-NS**

Customization is available upon request.