

QSDC-5000-6000-K1-20-S

5~6GHz, 100W, 20dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	5~6GHz
Insertion Loss:	0.2dB max.
Directivity:	18dB min.
VSWR (Main Line):	1.15 max.
Coupling:	20±1dB
Impedance:	50Ω
Average Power:	100W

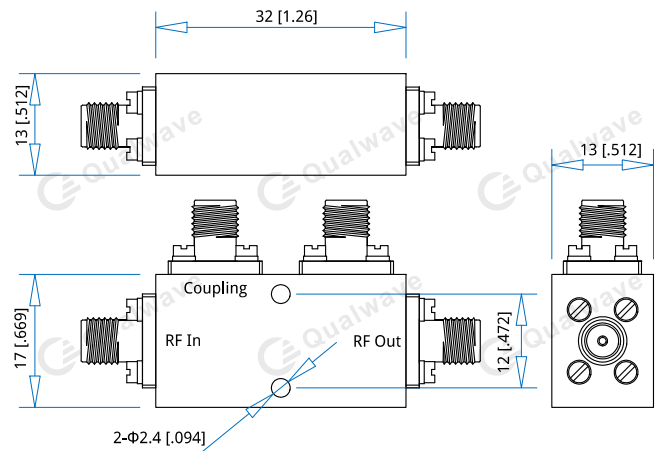
Mechanical

Size ^{*1} :	32*17*13mm 1.26*0.669*0.512in
Connectors:	SMA Female
Mounting:	2-Φ2.4mm through-hole

[1] Exclude connectors and terminations.

Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order
[QSDC-5000-6000-K1-20-S](#)

Customization is available upon request.