

QSDC-600-3000-K2-20-N

0.6~3GHz, 200W, 20dB

Features:
 * Broadband
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency:	0.6~3GHz
Insertion Loss:	0.3dB max.
Coupling:	20±1dB
Coupling Flatness:	±0.7dB max.
Directivity:	18dB min.
VSWR (Mainline):	1.3 max.
VSWR (Coupling):	1.3 max.
Average Power:	200W
Impedance:	50Ω

Mechanical


Size*1:	155*40*22mm 6.102*1.575*0.866in
Connectors:	N female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors and terminations.

Environmental

Operating Temperature: -40~+70°C

Outline Drawings

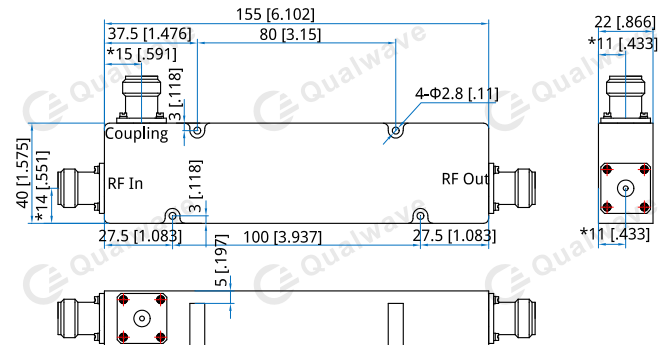

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in], *Ensure dimensions for design.

How To Order

QSDC-600-3000-K2-20-N

Customization is available upon request.