

## QSDC-600-3900-50-10-S

0.6~3.9GHz, 50W, 10dB

**Features:**

- \* Broadband
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical


Frequency:	0.6~3.9GHz
Insertion Loss:	0.5dB max.
VSWR:	1.2 max.
Directivity:	18dB min.
Coupling:	10±1.5dB
Impedance:	50Ω
Average Power:	50W

### Mechanical

Size <sup>*1</sup> :	113*15*11.2mm 4.449*0.591*0.441in
Connectors:	SMA Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors and terminations.

### Outline Drawings

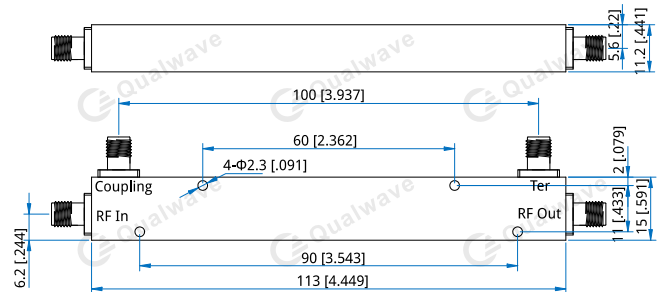

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QSDC-600-3900-50-10-S**

Customization is available upon request.