QWBF-5662-20

5.662GHz, 20dB

Features:
* High Stopband Rejection
* Small Size

Applications:
* Telecom
* Laboratory Test
* Receivers
* Instrumentation

Electrical

Input RF Frequency:	5.662GHz
Passband Insertion Loss:	1dB max.
VSWR:	1.5 max.
Stopband Attenuation:	20dB@5.642GHz min.
	20dB@5.682GHz min.
Impedance:	50Ω

How To Order

QWBF-5662-20-X-Y-Z

X: Connector type

Y: Material

Z: Flange type

Connector naming rules:

159 - WR-159

Material naming rules:

A - Aluminium

Flange naming rules:

2 - FDP

Examples:

To order a Waveguide Band Pass Filter, 5.662GHz, 20dB, WR-159, Aluminium, FDP58 to FDP58, specify QWBF-5662-20-159-A-2-2.

Customization is available upon request.

Mechanical

Size:	198*170*81mm
	7.795*6.693*3.189in
Waveguide:	WR-159 (BJ58) with FDP58

Outline Drawings

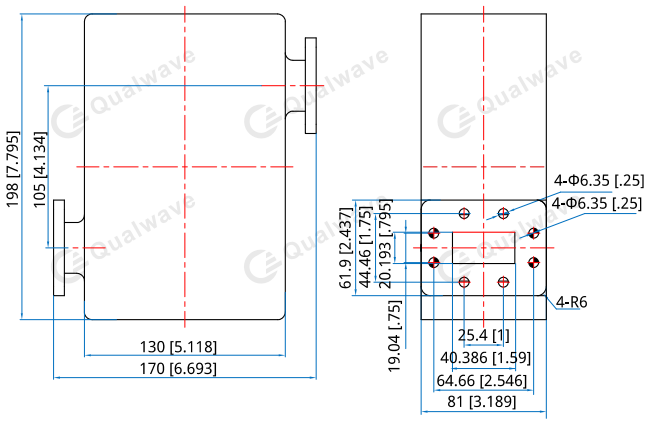

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]