

QWB-430

WR-430

Features:

- * Low VSWR
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	1.72~2.61GHz
VSWR:	1.1 max.
Insertion loss:	0.1dB max.

Mechanical

Interface:	WR-430 (BJ22)
Flange:	FDP22
Material:	Aluminum
Finish:	Conductive oxidation
Coating:	Gray paint

How To Order

QWB-430-U-W-X-Y-Z

U: Angle:

90 - 90°

W: H plane: H, E plane: E.

X: Material

Y: Flange type

Z: Serial number if different sizes

Bending Side:

E - E plane (Outline A)

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

2 - FDP (Outline A)

Serial number naming rules:


01 - (Outline A)

Examples:

To order a waveguide Bends, WR-430, 90°, E plane, Aluminum, FDP22, 110*110mm, specify QWB-430-90-E-A-2-01.

Customization is available upon request.

Outline Drawings

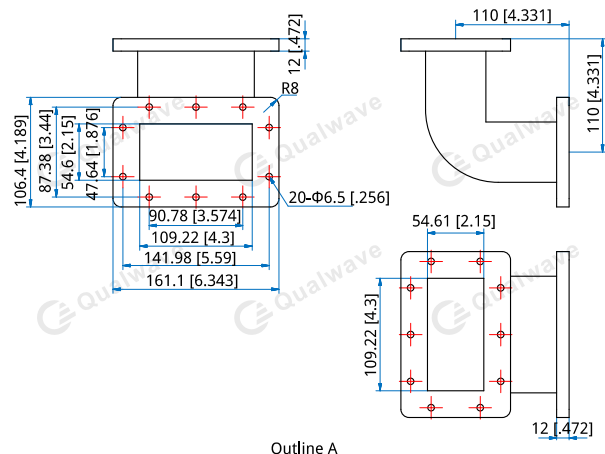

Outline A

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]