

# QWB-650

## WR-650

Features:  
 \* Low VSWR  
 \* High Isolation

Applications:  
 \* Wireless  
 \* Transmitter  
 \* Laboratory Test  
 \* Radar

### Electrical

Frequency: 1.13~1.73GHz  
 VSWR: 1.1 max.  
 Pressure Resistance: 0.2MPa

### Mechanical

Interface: WR-650 (BJ14)  
 Flange: FDP14  
 Material: Aluminum  
 Coating: Gray paint  
 Finish: Conductive oxidation

### How To Order

#### QWB-650-U-W-X-Y-Z

U: Angle:  
 90 - 90°  
 W: H plane: H, E plane: E.  
 X: Material  
 Y: Flange type  
 Z: Serial number if different sizes

Bending Side:  
 E - E plane (Outline A)

Material naming rules:  
 A - Aluminum (Outline A)


Flange naming rules:  
 2 - FDP (Outline A)

Serial number naming rules:  
 01 - (Outline A)

Examples:  
 To order a waveguide Bends, WR-650, 90°, E plane, Aluminum, FDP14, 100\*100mm, specify QWB-650-90-E-A-2-01.

Customization is available upon request.

### Outline Drawings

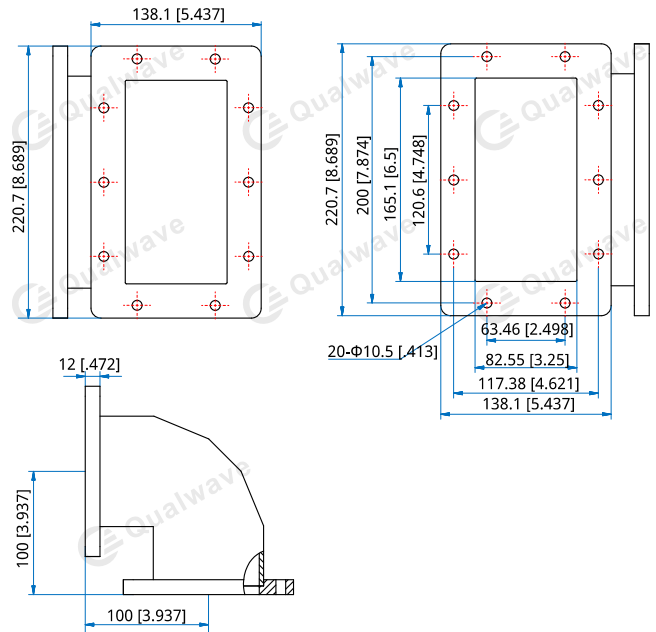

Unit: mm [in]  
 Tolerance: ±0.5mm [±0.02in]