

QWSS-650 WR-650

Features:
* Low VSWR
* High Isolation

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar


Electrical

Frequency: 1.13~1.73GHz
VSWR: 1.1 max.
Pressure Resistance: 0.2MPa

Mechanical

Interface: WR-650 (BJ14)
Flange: FDP14
Material: Aluminum
Surface Treatment: Conductive oxidation
Coating: Gray paint

Outline Drawings

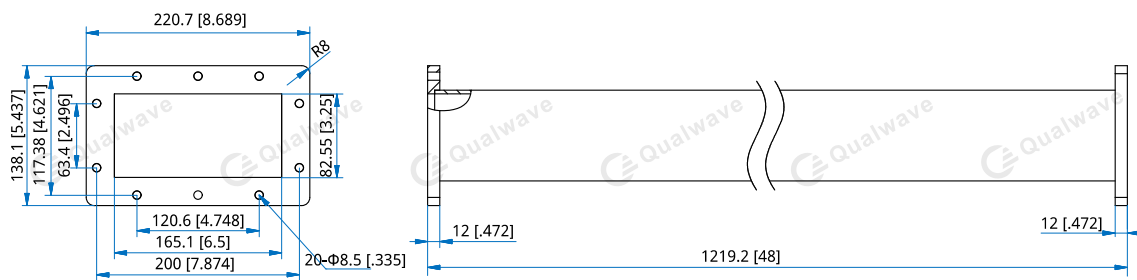

Unit: mm [in]
Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

QWSS-650-X-Y-Z

X: Length in mm.

Y: Material

Z: Flange type

Length in mm:
1219-1219.2mm

Material naming rules:
A - Aluminium

Flange naming rules:
2 - FDP

Examples:

To order a waveguide straight section, WR-650, 500mm, Aluminium, FDP14, specify QWSS-650-500-A-2.

Customization is available upon request.