

## QWVA-28-B-1

WR-28, Brass, FBP320

### Features:

- \* Low VSWR
- \* High Attenuation Flatness

### Applications:

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical


Frequency:	26.5~40GHz
VSWR:	1.2 max.
Attenuation:	0~30dB
Starting Attenuation:	0.5dB max.
Peak Power:	10KW

### Mechanical

Waveguide Size:	WR-28 (BJ320)
Flange:	FBP320
Material:	Brass

### Outline Drawings

(Dimensions are for reference only and are subject to change.)

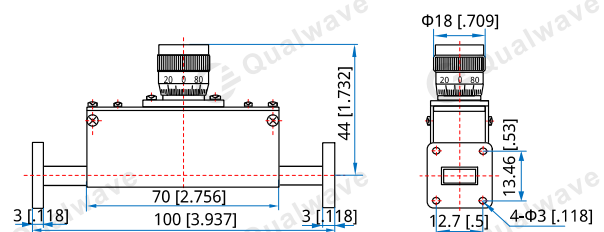

Unit: mm [in]

Tolerance:  $\pm 0.02\text{mm}$  [ $\pm 0.001\text{in}$ ]

### How To Order

**QWVA-28-B-1**

Customization is available upon request.