

QPD16-26500-50000-20-2

16-Way, 26.5~50GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	26.5~50GHz
Insertion Loss ^{*1} :	5.9dB max.
Input VSWR:	1.8 max.
Output VSWR:	1.8 max.
Isolation:	16dB min.
Amplitude Balance:	±1dB max.
Phase Balance:	±14° max.
Impedance:	50Ω
Power @SUM Port:	20W max. as divider 1W max. as combiner

[1] Excluding theoretical loss 12dB.

Mechanical


Size ^{*2} :	210*36*12.7mm 8.268*1.417*0.5in
Connectors:	2.4mm Female
Mounting:	5-Φ2.6mm through-hole

[2] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings

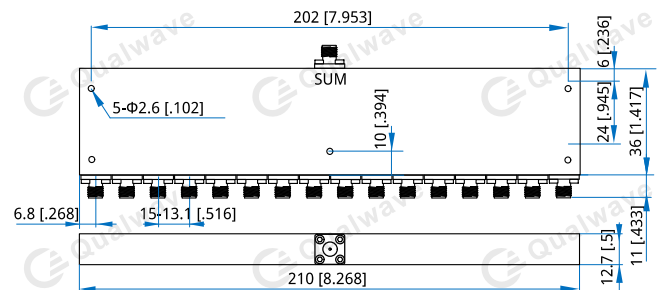

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD16-26500-50000-20-2

Customization is available upon request.