

QPD2-400-6000-K4-N

2-Way, 0.4~6GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.4~6GHz
Insertion Loss ^{*1} :	0.5dB max.
Input VSWR:	1.4 max.
Amplitude Balance:	±0.3dB max.
Phase Balance:	±5° max.
Impedance:	50Ω
Power @SUM Port:	400W max. as divider 400W max. as combiner

[1] Excluding theoretical loss 3.0dB.

Mechanical

Size ^{*2} :	150*100*22mm 5.906*3.937*0.866in
Connectors:	N Female
Mounting:	4-Φ2.6mm through-hole


[2] Exclude connectors.

How To Order

QPD2-400-6000-K4-N

Customization is available upon request.

Outline Drawings

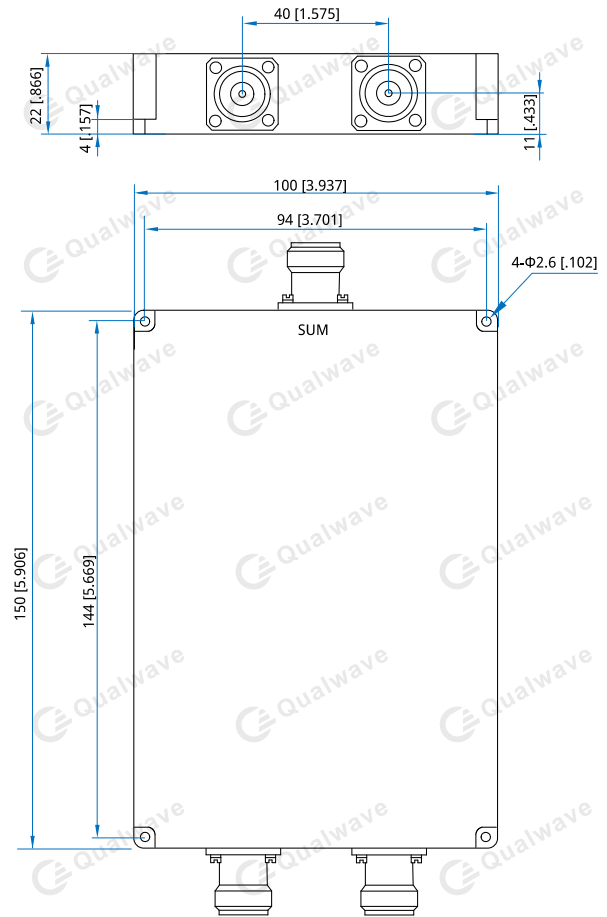

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]